


# GV Series Automated Dispensing Systems

A complete gantry automation system with vision for precise fluid application

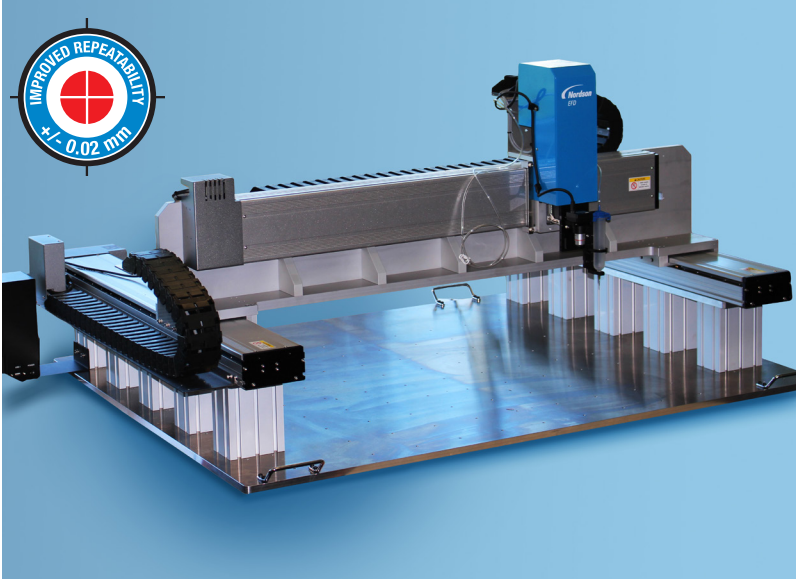

GV Series provides market-leading dimensional positioning accuracy and deposit placement repeatability.

Nordson EFD's vision-guided GV Series automated dispensing systems deliver easy automation for precise fluid applications.

Specialized DispenseMotion™ software and an integrated CCD smart vision camera make EFD automated systems quick to set up and easy to program. True three-dimensional motion control allows easy programming of dots, lines, circles, arcs, and compound arcs.

The GV Series is an ideal solution for precise fluid dispensing onto substrates requiring large work envelopes while not sacrificing repeatability.

The GV Series can work as a standalone system or as a key part of an automated solution and is easily integrated into rotary tables and conveyor-fed assembly lines.

## Features

- Simplified setup and programming with EFD's advanced vision-guided DispenseMotion software
- CCD smart vision camera
- True, three-dimensional motion control
- Work envelopes as large as 800 mm
- Unlimited workpiece payload

## Benefits

- Market-leading dimensional positioning accuracy and deposit placement repeatability
- Unlimited workpiece payload provides full range of dispensing application opportunities
- Streamlines training of in-house operators
- Seamless integration into any manufacturing operation
- Reduced production, material, and ownership costs
- Ideal for conveyor-fed automation



more info



## GV Series Specifications

Item / Model	G8V
Part # (150 mm post)	7363648
Number of axes	3
Maximum working area (X / Y / Z)	800 / 800 / 100 mm (31 / 31 / 4")
Tool payload	8.0 kg (17.6 lb)
Weight	181.5 kg (400.1 lb)
Dimensions	1,489w x 534h x 1,160d mm (59w x 21h x 46d")
Maximum speed (XY / Z)*	800 / 320 mm/s (31 / 13"/s)
Drive system	XY axis: Servo motor Z axis: 5-phase micro- stepping motor
Memory capacity	PC storage
General purpose I/O	8 inputs / 8 outputs (16 / 16 optional)
Input AC (to power supply)	220 VAC (±10%), 50/60 Hz, 10 Amp maximum, 420 W
Repeatability**	±0.1 mm/axis
Vision	CCD smart camera
DispenseMotion software	Included
Tip detection	Tip detector (optional)
Height detection	Mechanical (optional)
Approvals	CE, UKCA, RoHS, WEEE, China RoHS
Warranty	1 year, limited

\*Actual travel speed depends on the dispensing path and workpiece / tool payloads.

\*\*Repeatability results may vary depending on the method of measurement.

## Free Process Evaluation


Contact Nordson EFD to configure an automated dispensing system that meets your specific needs, with:

- A complimentary process evaluation by experienced fluid dispensing experts
- Samples processed for customer evaluation and approval prior to purchase

## Smart Vision

- Precise repeatability with powerful CCD camera
- Higher product quality and throughput

The GV Series systems include a CCD camera that converts pixels to digital values to deliver precise, high-quality images. The software confirms workpiece presence and placement and automatically adjusts as in-process variations occur.

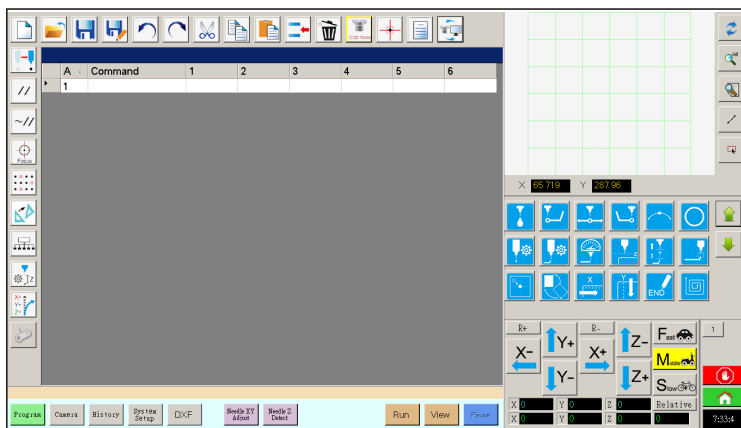

Vision-guided DispenseMotion software makes programming easy.



For Nordson EFD sales and service in over 40 countries, contact Nordson EFD or go to [www.nordsonefd.com](http://www.nordsonefd.com).

### Global

800-556-3484; +1-401-431-7000  
[info@nordsonefd.com](mailto:info@nordsonefd.com)

### Europe

00800 7001 7001  
[infoefd.europe@nordsonefd.com](mailto:infoefd.europe@nordsonefd.com)

### Asia

China: +86 (21) 3866 9006; [china@nordsonefd.com](mailto:china@nordsonefd.com)  
India: +91 80 4021 3600; [india@nordsonefd.com](mailto:india@nordsonefd.com)  
Japan: +81 03 5762 2760; [japan@nordsonefd.com](mailto:japan@nordsonefd.com)  
Korea: +82-31-736-8321; [korea@nordsonefd.com](mailto:korea@nordsonefd.com)  
SEAsia: +65 6796 9522; [sin-mal@nordsonefd.com](mailto:sin-mal@nordsonefd.com)

©2024 Nordson Corporation 110524