


Model DR Pump

Large capacity, air-driven, dual-piston pump engineered for superior performance in high-speed container coating applications.

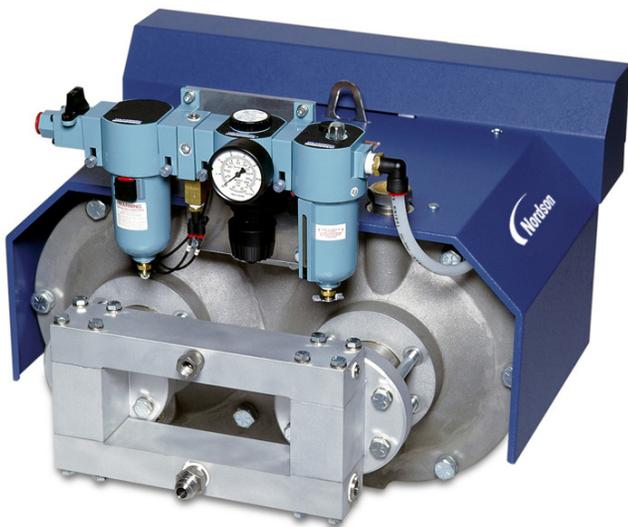

The Nordson model DR pump is an air-driven pump for use in the application of waterborne container coating materials and can be used in both heated and unheated delivery systems. Developed specifically for the container industry, the demand-type, dual-piston DR pump maintains constant fluid pressure throughout the pumping cycle to achieve the superior overall performance required in high-speed can coating applications.

Improved Serviceability

The model DR pump is designed for fast, easy and safe maintenance. Components are simple in design and readily accessible for ease of on-line, routine servicing and reduced downtime. For corrosion resistance and compatibility with a variety of can coating materials, all wetted parts are made of aluminum and/or stainless steel.

Features and Benefits

- Simple design facilitates quick replacement of air valve and hydraulic packing glands for easy on-line maintenance.
- Dual reciprocating plungers assure constant hydraulic pressure throughout the pumping operation.
- Aluminum and/or stainless steel wetted parts provide corrosion resistance and allow use of a variety of coating materials.
- Improved muffler configuration with production-proven mufflers helps prevent air-valve freezing.
- Overlapping piston-stroke design assures uniform and constant fluid pressure.
- Plastic air accumulator minimizes hydraulic “wink” and will not fill with water or corrode.
- Self-lubricated air motor and air valve provide long service life.
- Air filter/regulator/lubricator module can each be removed independently without disassembly of the entire unit, reducing downtime.

High Performance Operation

The model DR pump is designed for increased capacity at higher pressures. Maximum input air pressure is 80 psi. The DR pump is capable of producing 1200 psi hydraulic fluid pressure. It will supply multiple guns and deliver up to two gallons per minute at 45 strokes per minute.




Model DR Pump

Accessories

The DR pump is equipped for non-circulating operation. Optional circulation kits are also available.

Air Consumption (CFM)

Air Pressure	25 Strokes/Minute	35 Strokes/Minute	45 Strokes/Minute
75 PSI (517 kPa)	13.88 ft ³ /minute (0.39 m ³ /minute)	19.41 ft ³ /minute (0.55 m ³ /minute)	24.96 ft ³ /minute (0.71 m ³ /minute)
50 PSI (345 kPa)	10.0 ft ³ /minute (9.28 m ³ /minute)	14.0 ft ³ /minute (0.40 m ³ /minute)	18.0 ft ³ /minute (0.51 m ³ /minute)
25 PSI (172 kPa)	6.41 ft ³ /minute (0.17 m ³ /minute)	8.59 ft ³ /minute (0.24 m ³ /minute)	11.05 ft ³ /minute (0.31 m ³ /minute)

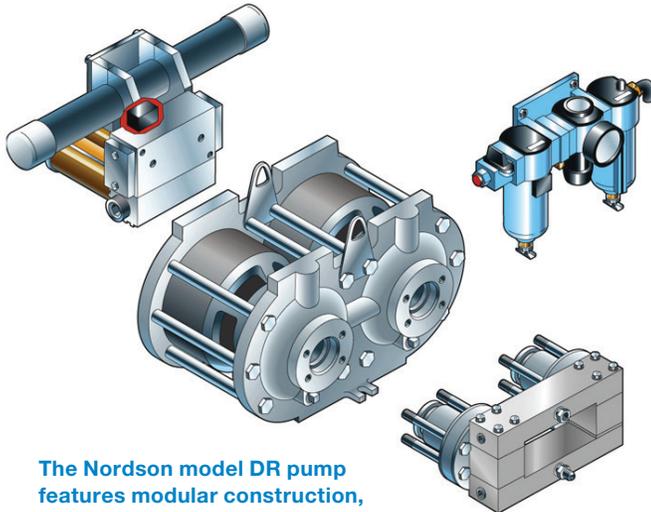

The Nordson model DR pump features modular construction, allowing easy maintenance and repair.

Technical Specifications

Dimensions: Height Width Depth	18.5 in. (355 mm) 24 in. (610 mm) 31 in. (840 mm)
Weight	206 lbs. (93.5 kg)
Minimum Air Supply	½" ID
Input Air Pressure	80 psi (550 kPa) maximum
Pressure Feed (if used)	20 psi (138 kPa) maximum
Fluid Pressure Output	1200 psi (8300 kPa) maximum
Maximum Fluid Delivery	2.0 GPM at 45 strokes/min. (7.6 l/min.)
Hydraulic Fluid Hose	¼ in. ID Nordson Reinforced PTFE
Siphon Hose	½ in. ID Nordson Nylon
Drain-off Hose	3/8 in. ID Nordson Nylon
Certifications	ANAB ISO 9001, ATEX/CE

Note: Only Nordson hoses or equivalent PTFE hoses with electrical continuity between fittings can be used with the DR pump. All hoses must be capable of withstanding 3000 psi (20,700 kPa).

© 2018 Nordson Corporation | All Rights Reserved | CNL-17-1374 | Revised 3/18

Why choose Nordson

In highly competitive manufacturing markets, productivity is vital and performance is essential. That's why we apply both to everything we do, whether it's our products, expertise or outstanding customer service. We'll always be there to help maintain the new standards you've set, with expert service and support delivered through our teams working across the globe.

This unique Nordson approach helps you reach new levels of production, while working more accurately, efficiently and competitively than ever. Precisely why manufacturers who demand quality, can rely on Nordson.

Nordson Industrial Coating Systems

100 Nordson Drive
Amherst, OH 44001
USA

Phone: +1.440.985.4000
www.nordson.com/ics

 /Nordson_Coating  /NordsonICS

 /company/nordson-industrial-coating-systems

Find your local Nordson office:
www.nordson.com/icslocations

Performance by design

