

DispensGun®

The DispensGun and components are manufactured by Nordson EFD in the U.S.A.

The DispensGun is easy to use and requires no special techniques.

The amount dispensed is controlled by the squeeze of the trigger and the size of the dispensing tip (larger tip, more flow).

When the trigger is released, the plunger retracts away from the reservoir piston, and dispensing stops.

Follow this step-by-step guide to begin using your new DispensGun.

To order the DispensGun:

3cc #7023133

5cc #7023137

10cc #7023125

30cc #7023134

55cc #7023141



The unique DispensGun simplifies application of medium to high viscosity fluids.

It is very easy to use and less fatiguing than other manual applicators.

This manual is for the express and sole use of Nordson EFD DispensGun purchasers and users, and no portion of this manual may be reproduced in any form.

Features

- Rugged construction provides years of use.
- Designed specifically for use with the Optimum® System components to eliminate drooling or dripping of fluids.
- Adjustable trigger fits all hand sizes.

Specifications

Handle and Trigger: Metal castings with black epoxy finish

Drive Rod, Selector Button, Hardware: Stainless steel

Barrel Adapter: High-strength acetal polymer

Drive Plunger: Aluminum

Weight (gun only): 311 g (11 oz)

Safety

Tests demonstrate that the DispensGun is fail-safe. With energetic use of the trigger, in excess of 13.8 bar (200 psi), and a clogged or sealed tip, the barrel ears may break. If this occurs, the barrel merely falls off, with no sudden or dangerous expulsion of either the barrel or fluid.

Filling Dispensing Barrels


- 1 Fill barrel, leaving required empty space as shown on Barrel Fill Level chart below.
- 2 Insert piston. A piston must always be used when operating the DispensGun.
- 3 Put on the blue tip cap and blue end cap to provide an airtight storage seal.

You may be using prepackaged barrels supplied by your distributor. Nordson EFD packages several fluids, including solder mask, thermal heat sink compound, solder paste and grease. Call +1-401-431-7000 for more information on these packaged fluids.

NOTE: Red pistons are recommended for use with the DispensGun.

Warning

If a dispensing tip becomes clogged, do not attempt to clear it by forcing the trigger. This may damage the DispensGun or tip. Replace the clogged tip.

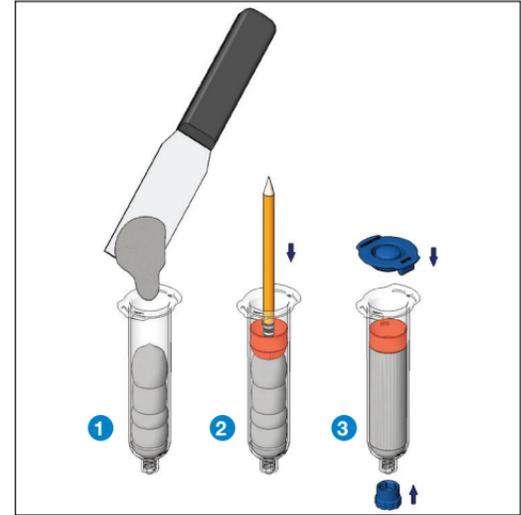


Barrel Fill Level

3cc	1.3 cm	0.5"
5cc	1.9 cm	0.75"
10cc	1.9 cm	0.75"
30cc	1.9 cm	0.75"
55cc	1.9 cm	0.75"

Operating the DispensGun

- 1 Gently squeeze trigger and move selector button to **R**.
- 2 Pull out drive rod as far as it will go.
- 3 Set hand grip by squeezing trigger and moving selector button to **2** or **1**.
- 4 Attach barrel to gun. Twist the barrel until it locks. If you turn past the locked position, the barrel will come out.
- 5 Remove tip cap and attach dispensing tip.
- 6 Turn drive rod knob until teeth face down and trigger mechanism is engaged (arrow on back of knob points down). Push drive rod until plunger touches piston.

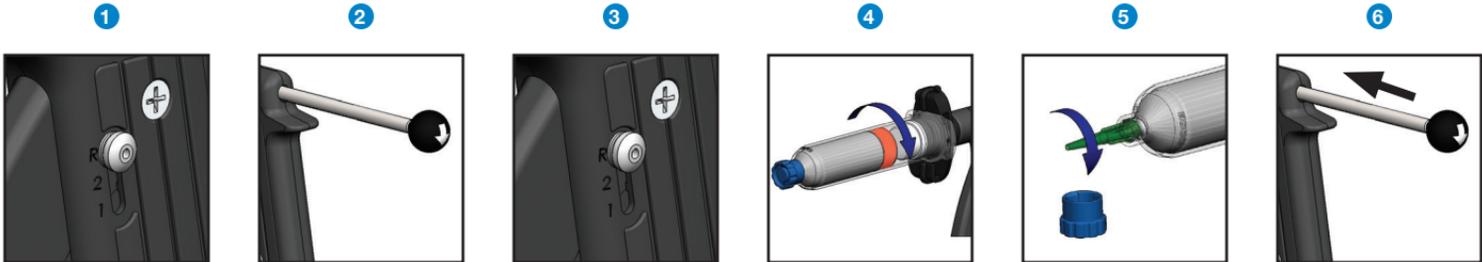


Operating the DispensGun (continued)


- 7 You are now ready to dispense. Squeeze the trigger gently until fluid flows. You control the amount. When trigger is released, dispensing stops.
- 8 When finished, remove empty barrel and discard. Barrels that are not empty can be sealed with tip caps for future use.

FOR BEST RESULTS: Hold the DispensGun with the tip at a 45° angle in contact with the work surface. Use the Test Sheet to practice dots and stripes.

NOTE: To ensure no-drip performance, the drive rod retracts after each deposit to relieve pressure on the piston. After several deposits, advance the drive rod by pushing the black knob forward, then continue dispensing.

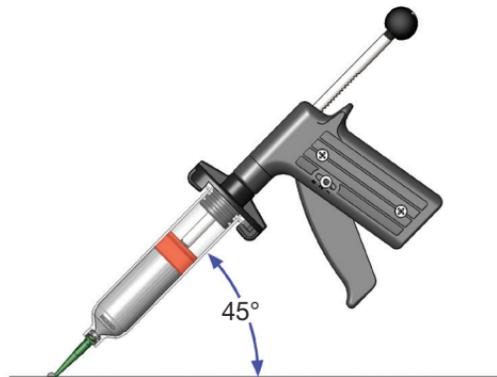

7



8

Cleaning the DispensGun

Inspect the drive plunger and wipe clean if necessary. Clean the gun surfaces with household or other mild, nonabrasive cleaners. Do not use solvents.

NOTE: EFD components are recyclable. Check with your local authorities concerning dispense residue.

List of Fluids

- silicones
- sealants
- RTV materials
- greases
- thick oils
- silver, gold, copper pastes
- solder paste
- particle-filled epoxies
- viscous adhesives
- organic cements
- stop-off fluids
- potting compounds
- paste flux
- brazing pastes
- uv-cure pastes

Types of Fluids to Dispense

All viscous, non-leveling fluids are ideal for easy application with the DispensGun.

If you have a problem...

Fluid doesn't flow.

Check to be sure the drive rod knob is pushed forward.

Check if tip is clogged. Do not attempt to dispense further. Replace with a new tip.

Fluid seeps around the piston.

The tip may be clogged and the squeeze pressure is forcing the fluid past the piston. Replace the tip.


You need more deposit control.

Use a different size dispensing tip. Smaller size for less flow. Larger size for more flow.

DispenseGun Accessories

Barrels / pistons:

Part #	Size	Description	QTY
7366043	3cc	Kit of clear barrels / red pistons	100
7366101	5cc	Set of clear barrels	100
7366140	5cc	Set of red pistons	100
7366089	10cc	Set of clear barrels	100
7366124	10cc	Set of red pistons	100
7366053	30cc	Kit of clear barrels / red pistons	50
7366066	55cc	Set of clear barrels	50
7366083	55cc	Set of red pistons	50




Barrel end caps: Snap-on caps ensure sealing of filled barrels for storage.

Part #	Size	QTY
7366108	3cc	100
7366113	5cc	100
7366104	10cc	100
7366071	30cc, 55cc	50



Precision stainless steel tips: Color-coded polypropylene hubs. 12.7 mm (0.50") and 25.4 mm (1.0") free lengths. (50) tips per box.

12.7 mm (0.50")	25.4 mm (1.0")	Gauge	ID mm inch	Color
7018043	7018032	14	1.54 0.060	Olive
7018068	7018059	15	1.36 0.053	Amber
7018122	7018110	18	0.84 0.033	Green
7018178	7018166	20	0.61 0.024	Pink



Smooth-flow tapered tips: Molded polyethylene. (50) tips per box.

Part #	Gauge	ID mm inch	Color
7018052	14	1.54 0.060	Olive
7018100	16	1.19 0.047	Grey
7018158	18	0.84 0.033	Green
7005009	20	0.61 0.023	Pink
7018298	22	0.41 0.016	Blue
7018391	25	0.25 0.010	Red



Barrel tip caps: Tip caps seal syringe barrels. One size fits all barrels.

Part #	QTY
7012198	50





EFD

For Nordson EFD sales and service in over 40 countries, contact Nordson EFD or go to www.nordsonefd.com.

800-556-3484; +1-401-431-7000

info@nordsonefd.com

infoefd.europe@nordsonefd.com

asia@nordsonefd.com

The DispensGun is patented by Nordson EFD. Patent #5,022,563.
©2025 Nordson Corporation 7018712 v072125